



SCHEMATIC :

(NOTE 1)

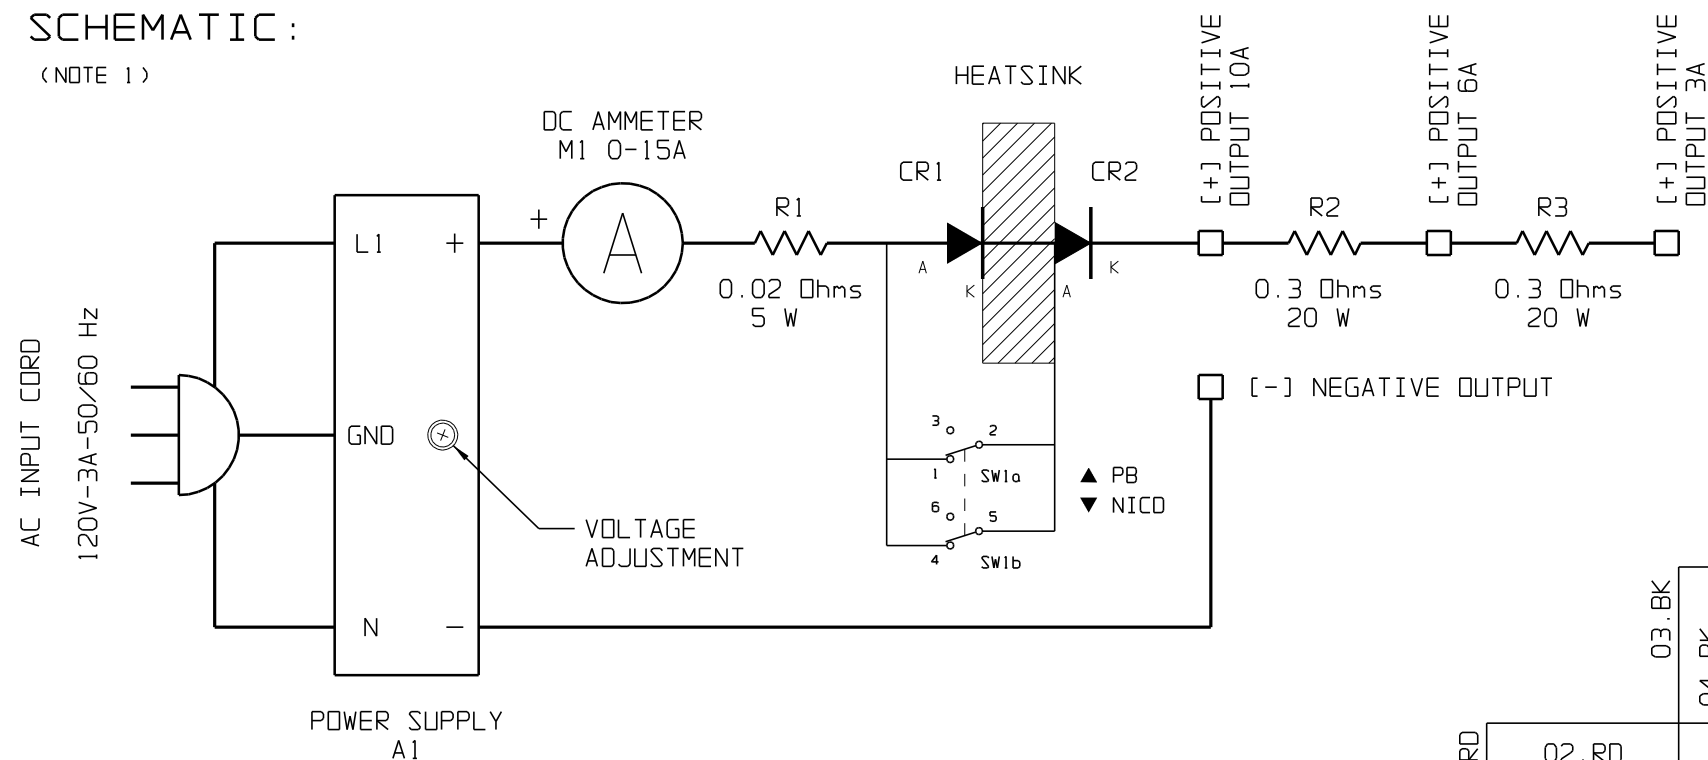

CONNECTION DIAGRAM :

(NOTE 2)

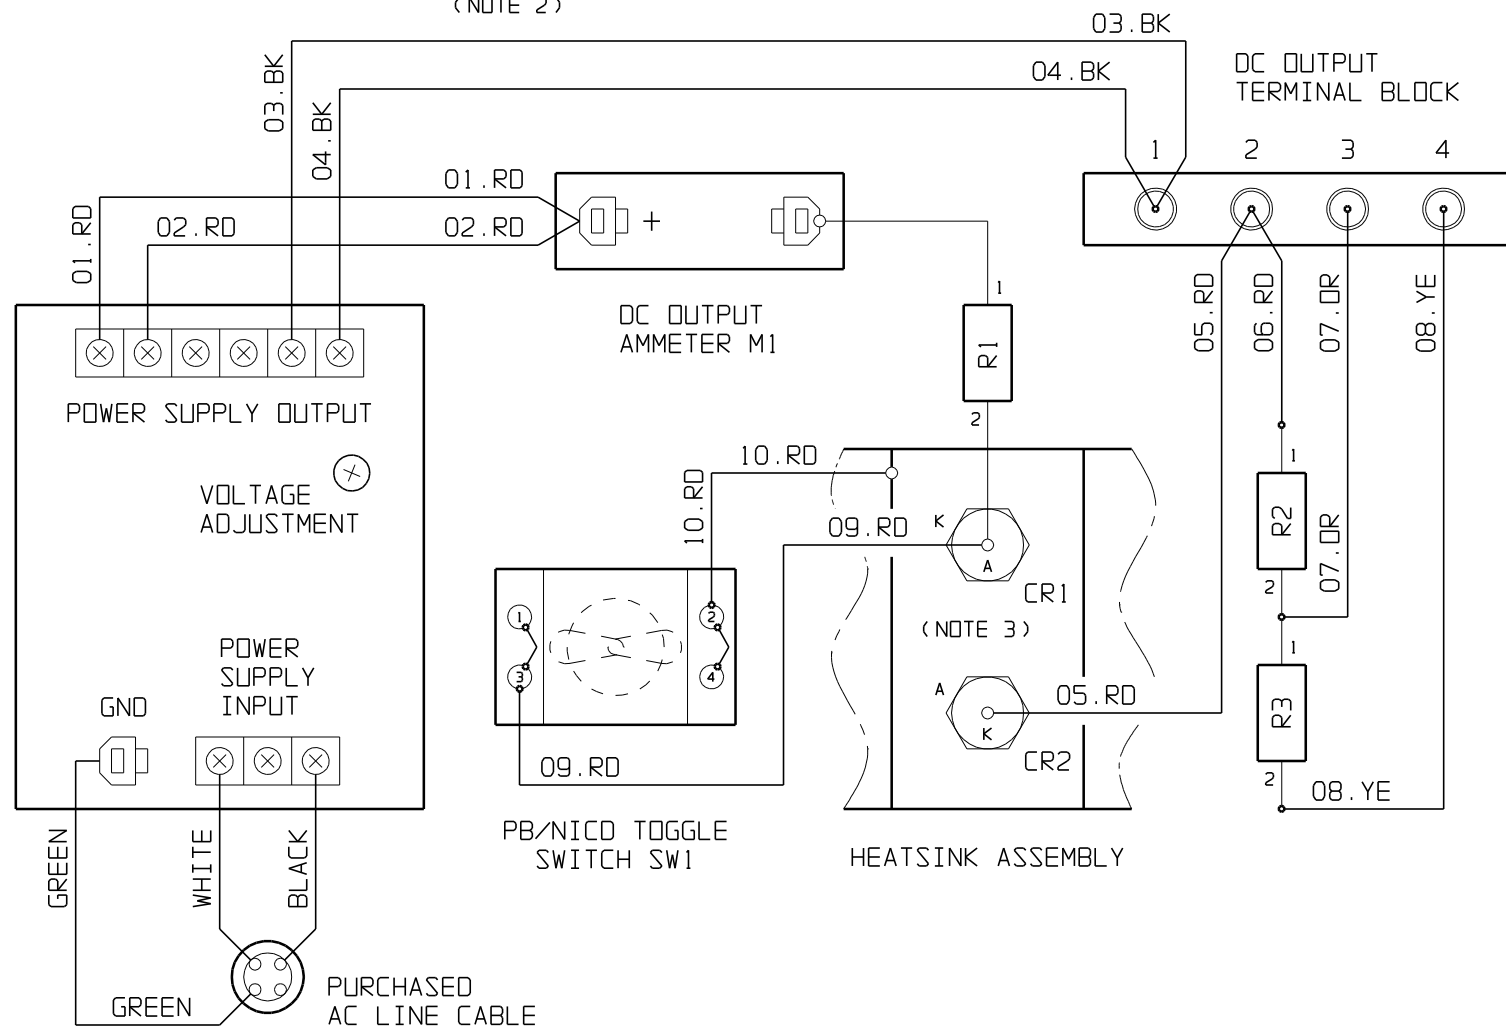

NOTES :

- 1) SEE USER INSTRUCTIONS ATTACHED TO INSIDE TOP LID OF CHARGER:
A) JC5001-00
B) JC5001-02
- 2) ALL WIRING IS #18 AWG PVC TYPE UNLESS OTHERWISE SPECIFIED.
- 3) !!! NOTICE !!! - CR1/CR2 ARE DIFFERENT PARTS
CR1 IS CATHODE-MOUNTED, WIRE TO ANODE.
CR2 IS ANODE-MOUNTED, WIRE TO CATHODE.

CONNECTION LEGEND :

- 0.25 QUICK CONNECT
- SOLDERED CONNECTION
- COMPRESSION TYPE CONNECTION

				THIRD ANGLE PROJECTION		HINDLEPOWER		1075 Saint John Street Easton, PA 18042-6661 PH 610-330-9000 FAX 610-330-8510 www.hindlepowerinc.com	
2	23802	071513	MCT	DRAWN BY	MCR	040903	TITLE SCHEMATIC / CONNECTION DIAGRAM: SINGLE-CELL BATTERY CHARGER (BB0442-01)		
1	20380	101806	MCT	APPROVED	<i>[Signature]</i>	040903	DRAWING No		REV 2
0	E1207	040903	<i>[Signature]</i>	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:			JE5066-00		B
REV	ECN No	DATE	APP	SCALE	NTS	PART No	JE5066-00	SHEET	1 OF 1