
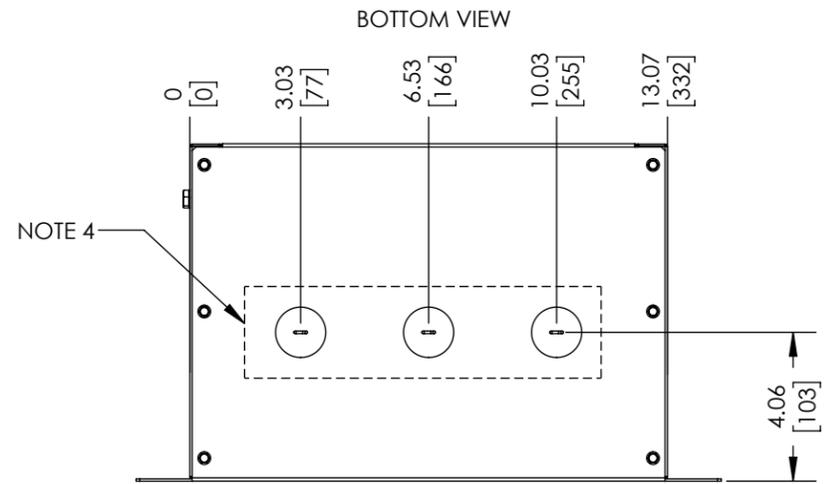
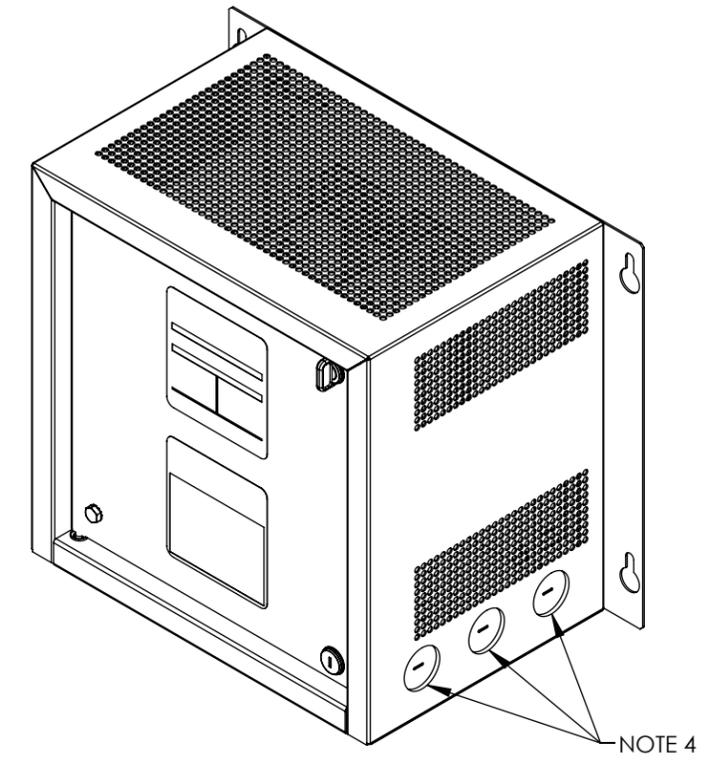
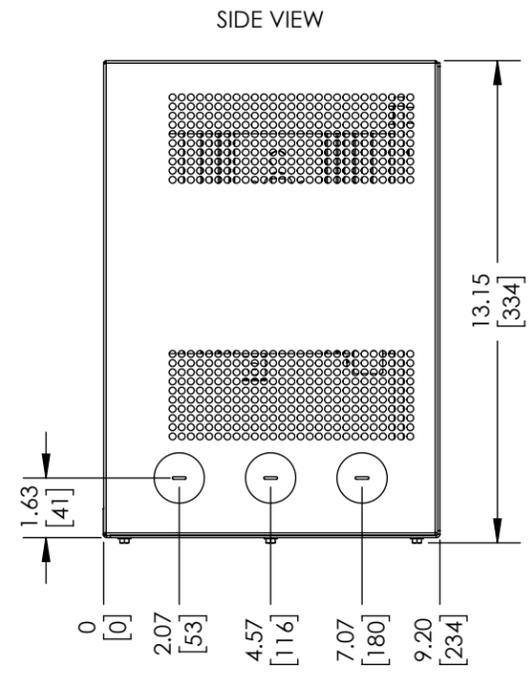


| PART No.    | VOLTAGE RATING | CURRENT RATING |
|-------------|----------------|----------------|
| EJ5144-0050 | 600 VDC        | 50 ADC         |

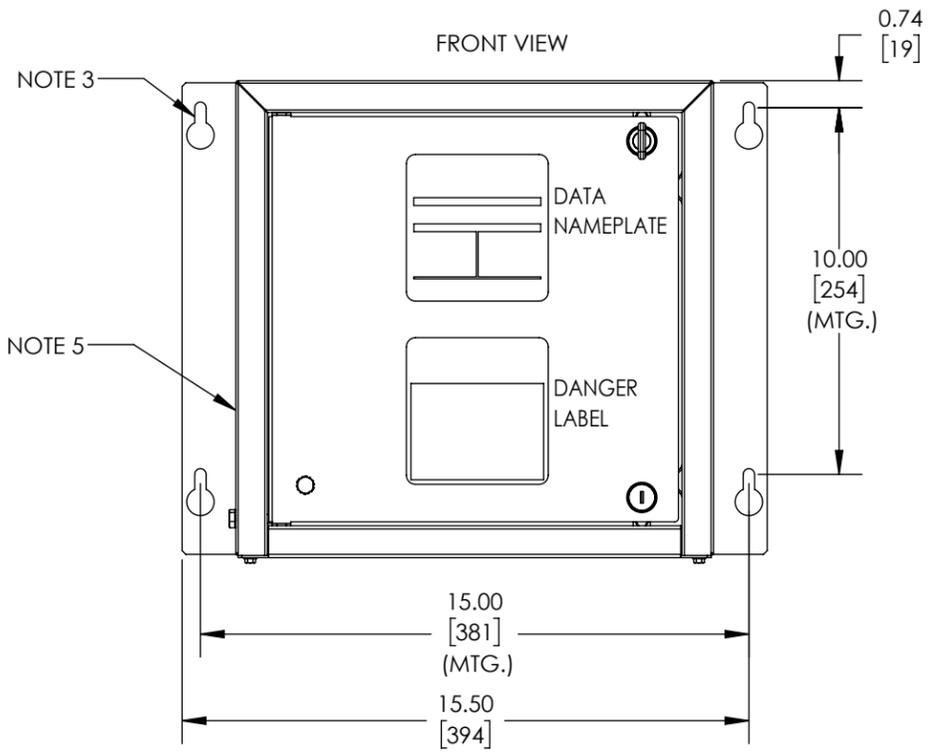

NOTES:

- ENCLOSURE IS A NEMA TYPE 1 / IP20 TOP-VENTED STEEL CABINET WITHOUT GASKETS. FINISH IS ANSI-61 GRAY EPOXY POWDERCOAT.
- ALLOW 6in / 152mm OF FREE AIR ON ALL VENTED SURFACES FOR COOLING.
- FOUR (4) KEY-HOLE SLOTS ARE PROVIDED ON BACK OF ENCLOSURE AS SHOWN, FOR WALL-MOUNTING WITH 0.25in / 6.25mm HARDWARE.
- SIX (6) 1.31in / 33mm DIA KNOCKOUTS ARE PROVIDED AS SHOWN. USE OF ANY OF THREE (3) LOWER CONDUIT KNOCKOUTS WILL ALLOW REMOVAL OF CABINET SHROUD WITHOUT REMOVAL OF EXTERNAL WIRING.
- BEST BATTERY SELECTOR SHIPPING WEIGHT: APPROXIMATELY 50 lb / 23 kg

DUAL DIMENSIONS in [mm]

|                                |             |             |             |                 |   |                 |  |  |                         |
|--------------------------------|-------------|-------------|-------------|-----------------|---|-----------------|--|--|-------------------------|
| REV: 0                         | DRN BY: KJB | CHK BY: KJB | APP BY: KJB | DATE: 2/12/2026 | DRN BY: KJB   | DATE: 12/8/2025 | TITLE<br><b>BEST BATTERY SELECTOR OUTLINE:<br/>NEMA-1 STYLE-5066 ENCLOSURE (50A)</b> | SCALE: 1:5<br>DWG No: <b>JE5314-00</b> | REV: 0<br>SHEET: 1 OF 1 |
| DESCRIPTION<br>Initial Release |             |             |             |                 | CHK BY: KJB   | DATE: 2/12/2026 |  |  |                         |
|                                |             |             |             |                 | APP BY: KJB   | DATE: 2/12/2026 |  |  |                         |
|                                |             |             |             |                 | UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS FOLLOW THE ANSI SYSTEM IPS (INCHES-POUNDS & SECONDS) TOLERANCES ARE: FRAC. ±1/64, DEC. ±0.015, ANG ±25° |                 |  |  |                         |

